


# SPIKA MS1500R 48"

MODULAR ICE CUBE MACHINE 220 V / 60 Hz

## FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL

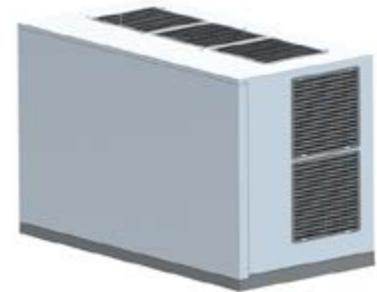

	 24 H	 70°F/20°C lbs (Kg)	 50°F/10°C lbs (Kg)	 90°F/32°C lbs (Kg)	 70°F/21°C lbs (Kg)	 in (mm)	 in (mm)
SPIKA MS1500R 48" F		1698 (770)	1576 (715)	Width 48" (1220)	Depth 24" (620)	Height 30" (763)	 <b>SPIKA HALF DICE</b> 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA MS1500R 48"H		-	-	Width 51" (1290)	Depth 27" (685)	Height 34" (890)	 <b>SPIKA FULL DICE</b> 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions

## ACCESSORIES

### INCLUDED



SCOOP

### NOT INCLUDED



DOUBLE 10" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS102



10" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS10



ADAPTER PLATES



SCALE KLEEN

## RECOMMENDED BINS



S900  
+  
1 | 2 SPIKA  
MS1500R



S1050  
+  
1 | 2 SPIKA  
MS1500R



SCD900  
+  
1 | 2 SPIKA  
MS1500R




SCD1400  
+  
SPIKA  
MS1500R



SCD1800  
+  
SPIKA  
MS1500R

# TECHNICAL SCHEME

SPIKA MS1500R 48"

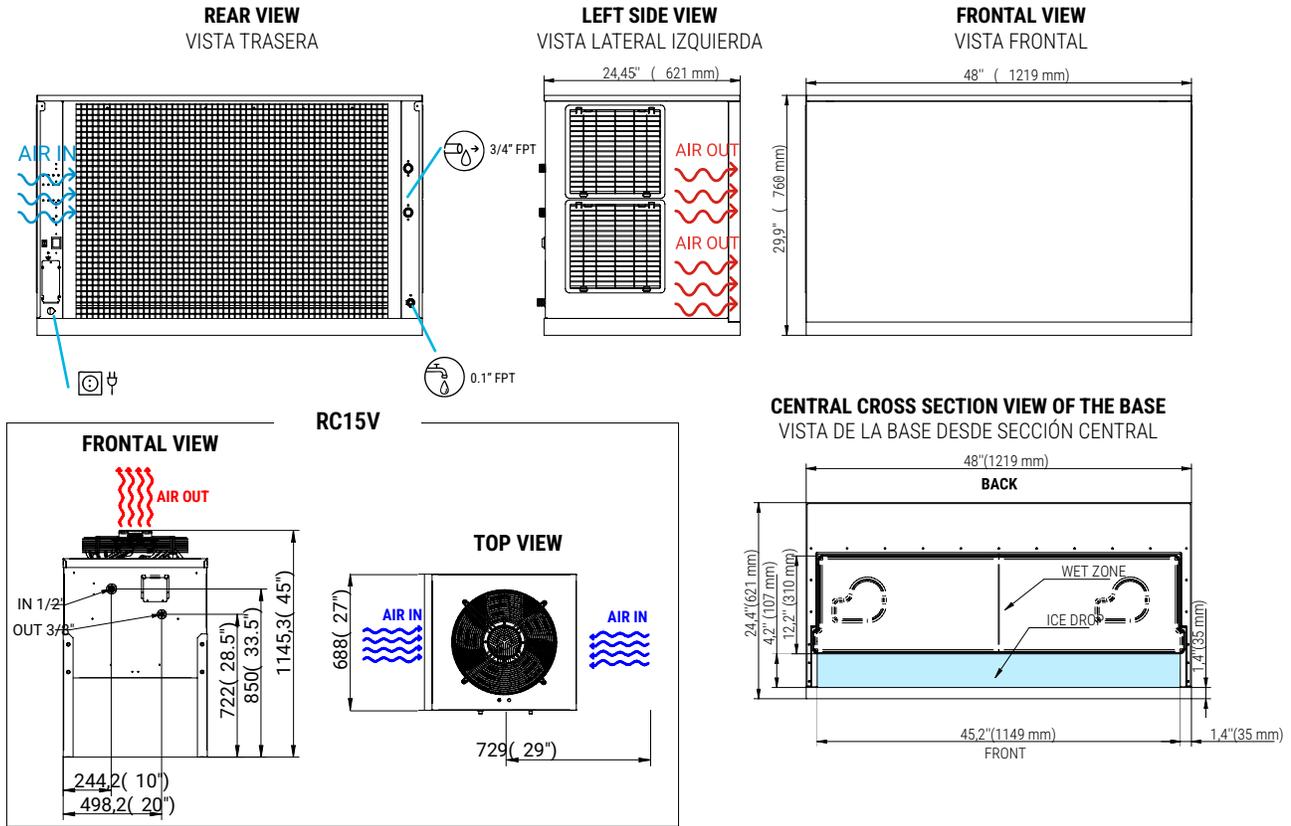

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS


PRODUCTION (LBS) 60Hz

±10% V

MACHINE	CONDENSER
50°F / 109°F	-4°F / 122°F
41°F / 86°F	-

14.5 psi (1 bar) / 87 psi (6 bar)

640/1280 Ice cubes/cycle



V	Hz	ph
220	60	1N



FULL DICE  
SPIKA MS1500R-48 AIR COOLED

°F / °C	50° / 10°	60° / 15°	70° / 21°	86° / 30°
50° / 10°	1708	1697	1686	1631
68° / 21°	1698	1682	1668	1609
90° / 32°	1609	1591	1576	1477
109° / 43°	1455	1437	1422	1335



HALF DICE  
SPIKA MS1500R-48 WATER COOLED

°F / °C	50° / 10°	60° / 15°	70° / 21°	86° / 30°
50° / 10°	-	-	-	-
68° / 21°	-	-	-	-
90° / 32°	-	-	-	-
109° / 43°	-	-	-	-

## MODELS

MODEL	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal / 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)		
SPIKA MS1500R 48" F	28.746	8.424	2.7	14/2.5	3	25	4.12	15.92 60.25	19.25	5,640	320	373
SPIKA MS1500R 48" H	28.746	8.424	2.7	14/2.5	3	25	4.19	17.24 65.25	19.25	5,640	320	373
RC15V	-	-	206	16/1.5	3	25-	-	- - -	-	-	-	-



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST

**WARRANTY:**  
ICE MAKERS - 3 YEARS PARTS AND LABOR  
EVAPORATOR - 5 YEARS PARTS AND LABOR  
COMPRESSOR - 5 YEARS PARTS

