ITV ICE makers

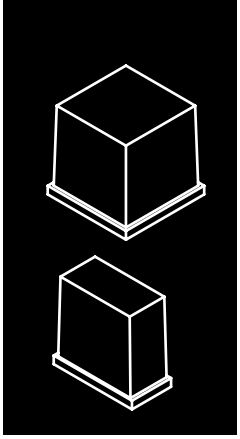

SPIKA MS1800 48”

220 V / 60 Hz

MODULAR ICE CUBE MACHINE

FEATURES

- PRODUCES FULL DICE OR HALF DICE ICE CUBES
- HIGH EFFICIENCY EVAPORATOR
- SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL

EASI — Easy Access for Service & Installation

STIF — Strong Inox Frame

	24 H lbs	70ºF/20ºC | 50ºF/10ºC lbs (Kg)	90ºF/32ºC | 70ºF/21ºC lbs (Kg)	in (mm)	in (mm)
SPIKA MS1800 48” F		**1811** (821)	**1499** (680)	Width **48”** (1220) Depth **24”** (620) Height **30”** (763)	Width **51”** (1290) Depth **27”** (685) Height **34”** (890)
SPIKA MS1800 48”H		**1811** (825)	**1516** (688)		

SPIKA HALF DICE

0,9” (W) x 0,4” (D) x 1” (H)

23 mm (W) x 11 mm (D) x 26 mm (H)

Average dimensions

SPIKA FULL DICE

1” (W) x 0,9” (D) x 1” (H)

26 mm (W) x 23 mm (D) x 26 mm (H)

Average dimensions

ACCESSORIES

INCLUDED

SCOOP

NOT INCLUDED

DOUBLE 10” FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS102

10” REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10

SCALE KLEEN

RECOMMENDED BINS

S900 + 1 | 2 SPIKA MS1800

S1050 + 1 | 2 SPIKA MS1800

SCD900 + 1 | 2 SPIKA MS1800

SCD1400 + SPIKA MS1800

SCD1800 + SPIKA MS1800

TECHNICAL SCHEME

SPIKA MS1800 48”

RIGHT SIDE VIEW



FRONTAL VIEW

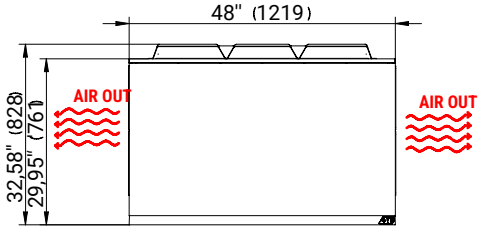

REAR VIEW

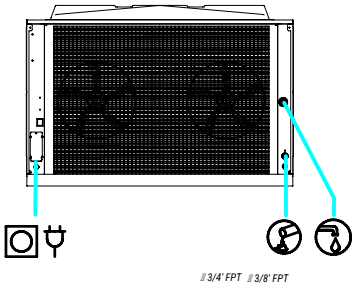

TOP SECTION VIEW OF THE BASE

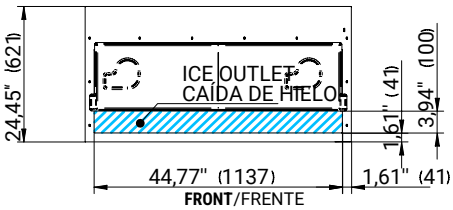

*** All dimensions in inches (and mm)**

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41ºF/109ºF

41ºF/95ºF

14.5 psi (1 bar) /87 psi(6 bar)

800/1600 Ice cubes/cycle



V	Hz	ph
220	60	1N

FULL DICE

SPIKA MS1800-48 AIR COOLED

°F / °C	50º / 10º	60º / 15º	70º / 21º	86º / 30º
50º / 10º	1873	1818	1763	1631
68º / 21º	1811	1752	1697	1168
90º / 32º	1631	1565	1499	1025
109º / 43º	1488	1410	1344	820

HALF DICE

SPIKA MS1800-48 WATER COOLED

°F / °C	50º / 10º	60º / 15º	70º / 21º	86º / 30º
50º / 10º	1830	1796	1741	1609
68º / 21º	1820	1752	1697	1543
90º / 32º	1631	1565	1516	1322
109º / 43º	1488	1410	1344	1150

MODELS	+cº / -cº ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109ºF	(AWG/mm²)	(n.)	FUSE	100lbs 90ºF / 70ºF (Kwh/100 lbs)	gal 100lbs	(l/h)	HEAT REJECTED (BTu/h)	(W)	(lbs)	(lbs)
SPIKA MS1800 48” F	28.746	8.424	2.7	14/2.5	3	25	4.12	15.92	60.25	19.25	5,640	320	373
SPIKA MS1800 48” H	28.746	8.424	2.7	14/2.5	3	25	4.19	17.24	65.25	19.25	5,640	320	373

ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com

TECHNICAL ASSISTANCE

SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST

WARRANTY:
ICE MAKERS - 3 YEARS PARTS AND LABOR
EVAPORATOR - 5 YEARS PARTS AND LABOR
COMPRESSOR - 5 YEARS PARTS

VERTICAL SYSTEM

0000_itvice/enes_10/B/26